Exam : 510-306

Title : powerbuilder 8.0 Developer

assciate

Version : DEMO

- 1. You write a script that uses dot notation to manipulate a DataWindow column property. What is the behavior when the property name is misspelled? (For example: dw_1.Object.emp_name.Visibl = "0")
- A. The script will not compile.
- B. The script will compile, but the code in the DBError event will execute at run time.
- C. The script will compile, but the code in the Error event for dw 1 will execute at run time.
- D. The script will compile, but the code in the ItemError event for dw_1 will execute at run time. Answer: C
- 2. Select three examples of script that correctly enable sharing of data among three DataWindows: the primary DataWindow that contains the data (dw_primary), and two secondary DataWindows that will display the same data (dw_secondary1 and dw_secondary2).

A. dw_primary.SetTransObject(SQLCA) dw_primary.Retrieve() dw_primary.ShareData(dw_secondary1) dw_primary.ShareData(dw_secondary2)

- B. dw_primary.SetTransObject(SQLCA) dw_primary.ShareData(dw_secondary1) dw secondary1.ShareData(dw secondary2) dw primary.Retrieve()
- C. dw_primary.SetTransObject(SQLCA) dw_primary.ShareData(dw_secondary1) dw primary.ShareData(dw secondary2) dw primary.Retrieve()
- D. dw_primary.SetTransObject(SQLCA) dw_primary.Retrieve() dw_secondary1.ShareData(dw_primary) dw_secondary2.ShareData(dw_primary)
 Answer: ABC
- 3. In a DataWindow control, if the user clicks on a row other than the current row, which event should be used to determine both the current row and the new row?
- A. RowChanged
- B. ItemChanged
- C. RowFocusChanged
- D. ItemFocusChanged
- E. RowFocusChanging

Answer: E

- 4. Which painter is used to associate a datawindow object with a datawindow control at design time?
- A. application painter


B. datawindow painter
C. library painter
D. database painter
E. window painter Answer: E
5. Which of the following Targets are considered Web Targets?
A. EAServer Component
B. Dynamo WebSite
C. WebSite
D. Migrate PowerSite 7.1 Project(s) Answer: BCD
6. For which two controls does GetItemAtPointer() return a reference to the item under the cursor?
A. ListBox
B. ListView
C. TreeView
D. DropDownListBox Answer: BC
7. Which is NOT a built-in global variable of an application?
A. SQLCA
B. Error
C. Transaction D. Message Answer: C
8. Which project is indicated for building a client application to access an EAServer component?
A. Application Wizard
B. Connection Object Wizard

C. EAServer Component Wizard

D. EAServer Proxy Wizard Answer: D
9. What function is called to dynamically add a tab control to a window?
A. Show()
B. OpenTab()
C. OpenSheet()
D. InsertObject()
E. OpenUserObject() Answer: E
10. Two object-level functions with the same name but with argument lists that vary in number or in datatype are said to be
A. extended B.
overlayed C.
overridden D.
overloaded Answer: D
11. What type of data source can be used with a DataWindow but not with a Pipeline?
A. query
B. SQL select statement
C. external
D. stored procedure Answer: C
12. The Timer event of a window can be initialized with which function?
A. Start()
B. Idle()
C. Sleep()

Answer: D
13. Which of following will center a main window, w_sheet, opened as a sheet within a MDI frame, w_mdi?
A. At design time, select the center property checkbox of w_sheet.
B. In the open event of w_sheet, set this.center = TRUE.
C. In the open event of w_sheet, set w_mdi.center = TRUE.
D. Sheets cannot be centered within an MDI frame. Answer: B
14. The Throws clause of a method signature should include:
A. A list of the checked exceptions that are caught by the method.
B. A list of the checked exceptions that may be thrown by the method.
C. A list of the checked exceptions that are either caught or thrown by the method.
D. A list of all exceptions that are either caught or thrown by the method, regardless of their type. Answer: B
15. Which of the following presentation styles are NOT supported by the WEB DataWindows?
A. Composite
B. Crosstab
C. Freeform
D. Graph
E. Group
F. N-Up Answer: AD
16. If multiple sheets are open in an MDI Frame and the user selects a different open sheet, what Window event would the developer code to re-initialize any instance variables on the sheet before allowing user access?
A. Show

D. Timer()

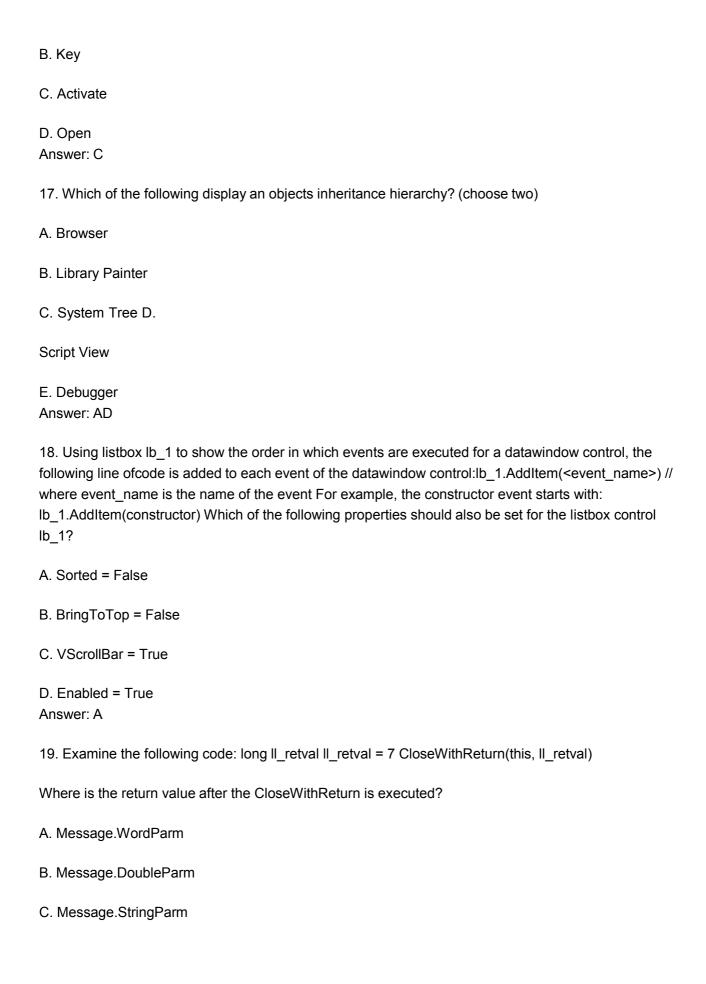

D. Message.PowerObjectParm

Answer: B

20. If you code the following (given emp_id is a valid integer column name) what will happen? integer li_i li_i=dw_1.object.emp_id.selected

- A. This code will not compile.
- B. li_i will contain the number of rows selected.
- C. li_i will contain an array of the selected emp_id's.
- D. This code will successfully compile, but will return an error at run time.

Answer: D

This document was created with Win2PDF available at http://www.win2pdf.com. The unregistered version of Win2PDF is for evaluation or non-commercial use only. This page will not be added after purchasing Win2PDF.

Trying our product!

- ★ 100% Guaranteed Success
- ★ 100% Money Back Guarantee
- ★ 365 Days Free Update
- ★ Instant Download After Purchase
- ★ 24x7 Customer Support
- ★ Average 99.9% Success Rate
- ★ More than 69,000 Satisfied Customers Worldwide
- ★ Multi-Platform capabilities Windows, Mac, Android, iPhone, iPod, iPad, Kindle

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:





Guarantee & Policy | Privacy & Policy | Terms & Conditions

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © 2004-2014, All Rights Reserved.