

Vendor: IBM

Exam Code:C2170-008

Exam Name: IBM Curam V6 Development

Version:Demo

QUESTION 1 Which of the following are valid non-key stereotypes for entity operations? A. nkdelete B. nkread C. nkinsert D. nkremove E. nkreadmulti Correct Answer: BDE **QUESTION 2** Which of the following are valid targets for the server-side build command? A. generated B. beandoc C. database D. messages E. codetables Correct Answer: AC

QUESTION 3

Examine the following piece of code:

```
<?xml version="1.0" encoding="UTF-8"?>
<PAGE PAGE ID="Application modify"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="file://Curam/UIMSchema.xsd">
    <PAGE_TITLE>
            <SOURCE NAME="TEXT" PROPERTY="PageTitle
        </CONNECT>
   </PAGE TITLE>
    <SERVER INTERFACE CLASS="MaintainPerson" NAME="ModifyPersonBean"</pre>
    OPERATION="modifyPerson" PHASE="ACTION"
    <SERVER INTERFACE CLASS="MaintainPa"</pre>
                                            NAME="RemovePersonBean"
    OPERATION="removePerson" PHASE="ACTION"/>
    <CLUSTER TITLE="Cluster.Modify"
        <!-- some FIELDs displaying edit-able data -->
        <ACTION SET TOP="false">
            <ACTION CONTROL LABEL="ActionControl.Modify" TYPE="ACTION" />
        </ACTION SET>
    </CLUSTER>
    <CLUSTER TITLE="Cluster.Remove">
        <!-- some FIELDs displaying data -->
        <ACTION SET TOP="false">
            <ACTION CONTROL LABEL="ActionControl.Remove" TYPE="ACTION" />
        </ACTION SET>
    </CLUSTER>
</PAGE>
```

On the built JSP, what happens when the user clicks the Remove action control?

A. Nothing happens, as there are no SERVER_INTERFACEs of PHASE SUBMITA.Nothing happens, as there are no SERVER_INTERFACEs of PHASE SUBMIT

- B. Only SERVER_INTERFACE RemoveServerInterface is invoked
- C. Only SERVER_INTERFACE ModifyServerInterface is invoked
- D. Both SERVER INTERFACEs are invoked

Correct Answer: D

QUESTION 4

Which of the following entity method stereotypes require SQL to be provided?

A. nsread

- B. ns
- C. nsmulti
- D. batch
- E. nsmodify

Correct Answer: BC

QUESTION 5

Attribute 1	Attribute 2	Attribute 3	
First	Second	Third	(A)
Fourth	Fifth	Sixth	(Q.
Seventh	Eighth	Ninth	9.
	9855		View Edit Remove

Examine this section of a C

Correct Answer: A

QUESTION 6

- A. insert
- B. read
- C. batch
- D. connector

Correct Answer: C

QUESTION 7

Custom validations written in Java can be localized by using an external locale-specific properties file. Which of the following are correct locale-specific properties files for such validations?

- $A.\ Custom Validation Messages_fr. properties.$
- $B.\ Jp_Custom Validation Messages. properties.$

- C. CustomValidationMessages.properties_fr.
- D. CustomValidationMessages_en_US.properties.
- E. Sp_CustomValidationMessages.properties.

Correct Answer: AD

QUESTION 8

Review the Screenshot presented.



What type of application navigation element can be expected to correspond with the element highlighted by the red box?

- A. Selection
- B. Menu
- C. Tab
- D. Navigation
- E. Shortcut-Tab

QUESTION 9


Which of the following are valid ways to enforce that a value be mandatory for a given attribute?

- A. Write custom logic at method level in the Java class
- B. Configure the Require_Mandatory property of the entity\\'s attribute to be set to true
- C. Specify the name of the field in the Mandatory_Fields property of the modeled operation\\'s argument struct
- D. Write a custom Java function to check for a value being present and specify the function on the Custom_Validation_Function_Name property of the relevant Domain Definition

Correct Answer: AC

QUESTION 10

Review the following diagram:

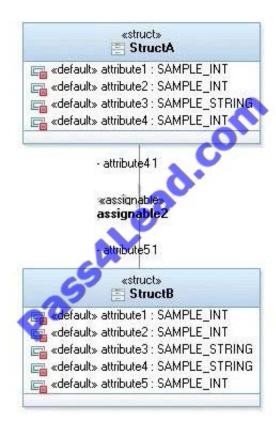

After a build generated, which of the following assign methods is generated on StructA?

A. public StructA assign(StructB structB){ structA.attribute1 = structB.attribute1; structA.attribute2 = structB.attribute2; structA.attribute3 = structB.attribute3; structA.attribute4 = structB.attribute4; }

B. public StructA assign(StructB structB){ structA.attribute4 = structB.attribute5; }

C. public StructA assign(StructB structB){ structA.attribute1 = structB.attribute1; structA.attribute2 = structB.attribute2; structA.attribute3 = structB.attribute3; }

D. public StructA assign(StructB structB){ structA.attribute1 = structB.attribute1; structA.attribute2 = structB.attribute2; structA.attribute3 = structB.attribute3; structA.attribute4 = structB.attribute5; }

Correct Answer: D

QUESTION 11

Suppose that a new Process class has been created in a model and a build generated command is performed. What needs to be done next?

- A. Implement the methods in the generated impl version of the class.
- B. Copy the generated impl class from the build/svr/gen/temp folder into the impl package.
- C. Create a new class in the impl package.
- D. Implement the modeled methods in the base class.

Correct Answer: C

QUESTION 12

When customizing a Codetable (CTX) file in C

Correct Answer: AD

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.